

AVVERTENZE

Le seguenti istruzioni devono essere seguite per una corretta installazione del prodotto, e servono a garantire la vostra sicurezza. È necessario conservarle per una successiva consultazione. Questo foglio deve essere a disposizione anche di chi ne avrà la manutenzione.



The device is suitable for mounting on normally inflammable surfaces.



Interior device (not waterproof).



Class I appliance.



The device conforms to current directive and norms.



Utilizzare lampade che non richiedono uno schermo di protezione supplementare.



Simbolo per lo smaltimento dell'apparecchio (vedere SMALTIMENTO DELL'APPARECCHIO – RAEE).

INSTALLAZIONE



- Estrarre l'apparecchio dagli imballi;
- Separare la calotta (A) dal piattello (B – la calotta è a pressione);
- Fissare il piattello (B) al plafone con adeguati tasselli con interasse 58mm (fig.2);
- Regolare l'altezza della sospensione agendo sulla vite che fissa il cavo di acciaio posto nel rosone; tagliare il cavo in eccedenza.
- Collegare i cavi di alimentazione alla morsetteria; il filo giallo-verde deve essere collegato al morsetto contrassegnato dal simbolo ⊕;
- Sistemare la calotta sul piattello;
- Posizionare i petali sul supporto (C): partendo dal basso completare il primo anello incastrando i fissaggi (D) sui tubetti, quindi salire di un livello e continuare fino all'ultimo anello seguendo lo schema indicato dei punti di fissaggio (E);
- Inserire la lampadina rispettando il tipo e la potenza indicati sull'apparecchio.

CAUTELE DA ADOTTARE DURANTE L'USO DELL'APPARECCHIO

- Non coprire l'apparecchio (ad esempio con panni, foulard, ecc.);
- Usare l'apparecchio nella posizione prevista: non caricare né ribaltare l'apparecchio;
- Durante la manutenzione (per sostituzione lampadina o pulizia) scollegare la spina dalla presa.
- Per la pulizia utilizzare solamente un panno asciutto;.

NOTE SUPPLEMENTARI

- Per la vostra sicurezza non modificare l'apparecchio;
- Nel caso sia necessario sostituire il cavo di alimentazione (per esempio se accidentalmente si dovesse danneggiare) rivolgersi al fabbricante per procurarsi il corretto ricambio e far eseguire la sostituzione.
- La Martinelli Luce Spa non si assume alcuna responsabilità per prodotti modificati senza preventiva autorizzazione

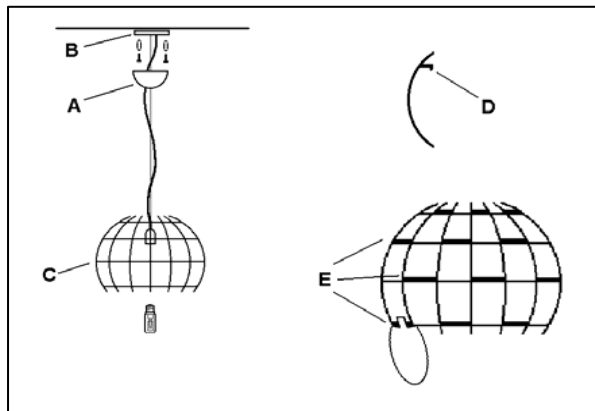

WARNING

The following instructions must be followed for a correct installation of the product, and serve to guarantee your safety. Please retain for future reference and make available to those that maintain the product.



The device is suitable for mounting on normally inflammable surfaces.



Interior device (not waterproof).



Class I appliance.



The device conforms to current directive and norms.



Use bulbs that do not require an additional protection screen.



Symbol for product disposal (see DISPOSAL OF THE APPLIANCE – RAEE).

ASSEMBLY INSTRUCTIONS

- Remove the device components from the packaging;
- Separate the cup (A) from plate (B – Pression closure);
- Fix the plate (B) to the ceiling with appropriate anchors at a distance 58mm (Fig.2);
- Regulate the position of device operating to screw that fix the still cable placed: cut the surplus cable.
- Connect the power supply cables to the terminal; the yellow/green power cable must be connected to the terminal marked with the symbol ⊕;
- Put the cup into the plate;
- Position the petals into support (C): starting from down complete the first ring blocking the fastening (D) on the tubes, after that repeat the same procedure for the successive rings until the last ring following the scheme of the point of fixing (E);
- Screw the bulb on following the type and power indicated on the device

CAUTION TO BE ADOPTED DURING USE OF THE DEVICE

- Do not cover the device (for ex. with rags, scarves etc.);
- Use the device in the suitable position: do not load or tilt the device;
- During maintenance (to change the bulb or cleaning) disconnect the plug from thr mains socket.
- To clean use only a dry cloth

ADDITIONAL NOTES

- For your safety do not modify the device;
- In case it is necessary to change the supply cable (for ex. if it was accidentally to be damaged) refer to the supplier to procur the correct spare and carry-out the substitution;
- Martinelli Luce Spa does not assume any responsibility for products modified without authorisation;

